



# PROJECTOR PG703W

## Key Features

Bright Images in Any Environment | Fine-Tuned Viewing | Amazing Color Accuracy | Immersive 3D Viewing | Dual HDMI input and MHL Support




## Product Description

The ViewSonic PG703W are high brightness WXGA projectors respectively, featuring 4000 ANSI lumens and high 22,000:1 contrast ratio to produce the finest of details regardless of the amount of ambient lighting for projection in any medium sized spaces, such as meeting rooms or classrooms. PG703W come with an energy-saving SuperEco mode that reduces power consumption and extends lamp life to up to 15,000 hours, reducing the frequency of lamp replacement and lowering the maintenance costs. In addition to dual HDMI input (MHL), S-Video, and VGA out, these projectors are integrated with RS232 and LAN, certified by Crestron, AMX and PJ Link networkable solutions, making it easy to controlled and monitor these projectors remotely.



- 01. Keypad
- 02. LED indicator
- 03. Lamp cover
- 04. Security lock
- 05. Zoom/Focus
- 06. Front IR

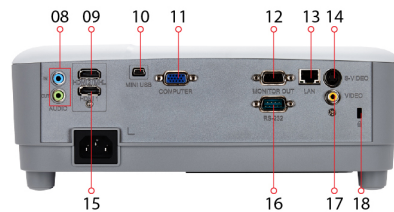

- 07. Projection Lens
- 08. Audio in/out
- 09. HDMI/MHL
- 10. Mini USB for Service
- 11. VGA
- 12. VGA out
- 13. LAN
- 14. S-Video
- 15. HDMI
- 16. RS232
- 17. Video
- 18. Kensington® Lock Slot

Visit Us [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Projection system:	0.65" WXGA
Native Resolution:	1280x800
DC type:	DC3
Brightness:	4000 ANSI Lumens
Contrast Ratio with SuperEco mode:	22000:1
Display Color:	1.07 Billion Colors
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=2.56-2.68, f=22-24.1 mm
Projection Offset:	100% +/-5%
Throw Ratio:	1.55-1.70
Image size:	30" - 300"
Throw Distance:	1m-10.98m(100" @3.34m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.1x
Audible Noise (Eco):	29dB
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1084p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

**INPUT**

Computer in (share with component):	1
Composite:	1
S-video:	1
Audio-in (3.5mm):	1
HDMI:	1 (Back)
HDMI/MHL:	1 (Back)

**OUTPUT**

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W

**CONTROL**

RS232:	1
RJ45:	1
USB type mini B (Services):	1

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 350W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.4kg
Dimensions (WxDxH) w/adjustment foot:	294x218x110mm
Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese

**STANDARD ACCESSORY**

Power Cord:	1
VGA cable:	1
Remote Control:	1 (w/Laser pointer)
QSG:	1
Air Filter:	RSPL