



PROJECTOR PA505W


Key Features

- Bright Images in Any Environment |
- Room Filling Sound | Pinpoint Color Accuracy |
- Fine-Tuned Viewing Modes | Immersive 3D Experience



Product Description

The ViewSonic PA505W WXGA DLP projector offers impressive audiovisual performance for presentations in the meeting room and in the classroom. Packed with 3500 ANSI lumens of brightness and a 22,000:1 contrast ratio, PA505W is guaranteed to display the finest of details, even in brightly lit environments. Dual HDMI inputs enable multiple users to connect laptops and mobile devices simultaneously for a high-definition experience without lapses of time between presenters. Additionally, the projector's integrated USB power supply can be used as a power source for any HDMI connected dongle. PA505W's audio is powered by ViewSonic's specially tuned SonicExpert® technology to deliver room-filling sound. When you're done using the projector, the auto power off function can be used to power off your projector instantly to reduce energy consumption and extend lamp life.

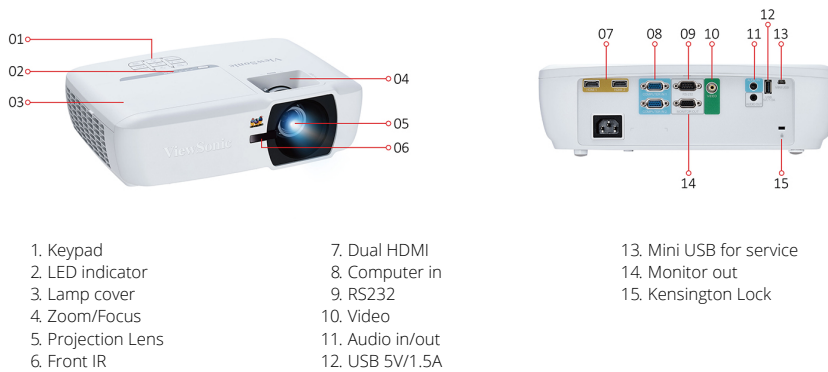

Visit Us ■ www.viewsonic.com

SPECIFICATION

Projection system:	0.65" WXGA
Native Resolution:	1280x800
DC type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio with SuperEco mode:	22000:1
Display Color:	1.07 Billion Colors
Light Source:	Lamp
Light source life (Nor/SuperEco):	3500/7000
Lamp Watt:	240W
Lens:	TBD
Projection Offset:	111%+/-10%
Throw Ratio:	1.54-1.71
Image size:	30" - 300"
Throw Distance:	1m-11m (100"@3.32m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.1x
Audible Noise (Eco):	30dB
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

INPUT

Computer in (share with component):	2
Composite:	1
Audio-in (3.5mm):	1
HDMI:	2 (Back)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	8W Cube
USB type A (Power):	1 (5V/1.5A)

CONTROL

RS232:	1
USB type mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 310W Standby: <0.5W
Operating Temperature:	5~40°C
Carton:	Brown
Net Weight:	2.94kg
Dimensions (WxDxH) w/adjustment foot:	348x234x107mm
Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese

STANDARD ACCESSORY

Power Cord:	1
VGA cable:	1
Remote Control:	1
QSG & CD:	QSG: 1 / CD: NA