


## MultiSync® V554-MPi3 LCD 55" Value Large Format Display

# Datasheet

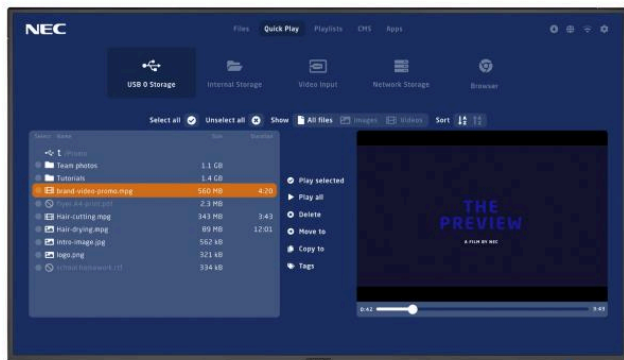

### Digital signage and real-time information deployed easily

Initiating effective communication to your target audience has never been easier to plan, install and operate. Deploying Signage with consistently updated information, real-time content adaption and scheduling has never been so simple.

The 55" MultiSync® V554-MPi3 provides a sleek combination of intuitive media playback with professional digital display technology for impactful messaging in retail environments, leisure and museum applications as well as quick service restaurants. Fitting perfectly into corporate environments and public spaces, the modern, slim design integrates seamlessly with the surrounding architecture whilst the 500 cd/m<sup>2</sup> brightness output and anti-glare surface ensures excellent viewing.

Futureproof and upgradable, the NEC MediaPlayer Software is powered by a pre-installed modular SoC Raspberry Pi module. Enabling remote operation of single and multiple display installations, benefit from flexible usage of many media types and a scheduling function for smart content management. For specific feature demands, the NEC MediaPlayer grants easy switching to the integrated Content Management Systems directly.

## Benefits

**Ease of use and operation** – smart installation, operation and maintenance functionality ensures accurate performance over the entire lifetime of the display saving time, effort and resources.

**Everything under control** – one single interface is needed to manage both the NEC MediaPlayer and the display directly, via a web-interface or the NEC Display remote control.

**Mission-critical 24/7 ready operation** – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

**Cost Saving Device Management** – save effort whilst managing all connected NEC devices from a centralised location by using the NaViSet Administrator 2 software tool.

## Product Information

Product Name	MultiSync® V554-MPi3
Product Group	LCD 55" Value Large Format Display
Order Code	60005006

## Display

Panel Technology	IPS with Edge LED backlights
Active Screen Area (W x H) [mm]	1,209.6 x 680.4
Screen Size [inch/cm]	55 / 138.8
Brightness [cd/m²]	500, 350 Eco (shipment setting)
Contrast Ratio (typ.)	1200:1
Viewing Angle [°]	178 / 178 (at contrast ratio > 10:1)
Colour Depth [bn]	1.073 (10bit)
Response Time (typ.) [ms]	8 (grey-to-grey)
Haze Level [%]	Pro (44)
Supported Orientation	Landscape, Portrait, Face Up, Face Down

## Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	24 - 85

## Resolution

Native Resolution	1920 x 1080			
Supported Resolutions	4096 x 2160; 3840 x 2160; 1920 x 2160; 1920 x 1200; 1920 x 1080;	1680 x 1050; 1600 x 1200; 1440 x 900; 1400 x 1050; 1366 x 768;	1360 x 768; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 720;	1024 x 768; 800 x 600; 640 x 480

## Connectivity

Input Video Analogue	1 x VGA
Input Video Digital	1 x DVI-D (with HDCP); 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x LAN 100Mbit; 1 x Remote Control (3.5 mm jack); 1 x RS232
Input Data	1 x USB 2.0 (Service); 1 x USB Type-B (Upstream); 2 x USB 2.0 (Compute Module, 1 x 5V/2A powered); 2 x USB 2.0 (NEC MediaPlayer)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit

## Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	10 / 61

## Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable

Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

## Electrical

Power Consumption Eco/max. [W]	105 Eco (shipment setting), 150
Power Savings Mode [W]	< 0.5 (ECO Standby); < 3 (Networked Standby)
Power Management	VESA DPMS

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80

## Mechanical

Dimensions (W x H x D) [mm]	1,244 x 714.8 x 62.9
Weight [kg]	24.5
Bezel Width [mm]	14.2 (left and right); 14.2 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5X (front); IP2X (back)

## MediaPlayer

Supported File Storage / File System	FAT16 / FAT32 @ USB 2.0
Internal Storage	32GB eMMC (2GB occupied by OS, 28GB available for files)
Processor	Cortex-A53 (ARMv8) 64-bit SoC @ 1.2GHz
Supported Image Formats	JPG; JPEG; PNG
Supported Video Formats	MP4 / MOV / MKV (H.264); MPEG-2; M4K; VP8 / VP9; HTML5
Supported Audio Formats	MP3; AAC; AC-3

## Available Options

Accessories	Feet (ST-401); Speaker (SP-TF1, SP-554SM); Trolley (PDMHM-L); Wall mount (PDW S 32-55 L and P, PD02W T L L, PD03W T M P)
OPS Slot	HD-SDI 1.5G, 3G; HDBaseT receiver; Intel® Atom, Celeron and Core CPUs; OPS-2C HDMI + DP Interface; OPS-2C Quad 3G SDI

## Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 175 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: B; Human Sensor
Ecological Standards	EnergyStar 7.0

## Additional Features

Special Characteristics	Ambient Light Sensor; AMX NetLinx Support; ASCII Control Commands; Auto ID assignment; Auto tiling function; Automated Email Alert; CEC Support; Cisco Webex Kit compatible; Crestron RoomView Support; DICOM Simulation; Display Browser Control; Emergency Notification; Full System Scheduler; Hardware colour calibration possible; Image flip; Intelligent Wireless Data (based on NFC); KeyGuide; MediaPlayer with Browser Control; NaViSet Administrator 2; OmniColor Control; OSD rotation for portrait mode; PJLink Support; Point Zoom Function; Powered USB-Port; Programmable 12-bit LUT with 3 memory banks; Removable Logo; Secure Mode Operation; Slim LED Indicator; SNMP Support; TileMatrix (10 x 10); User readable log function; Various picture in picture options
Colour Versions	Black Front Bezel, Black Back Cabinet; optional coloured overframes

Safety and Ergonomics	C-tick; CE; EMC Class B; FCC; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Pixel Failure Class	ISO 9241-307, Class 2
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; HDMI Cable; Power Cable; Remote Control
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7



CE



C-tick



RoHS



TÜV GS



VCCI

This document is © 2020 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 05.05.2020