
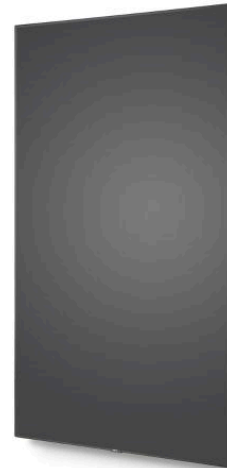


MultiSync® V554Q-MPi3 LCD 55" Value Large Format Display

Datasheet

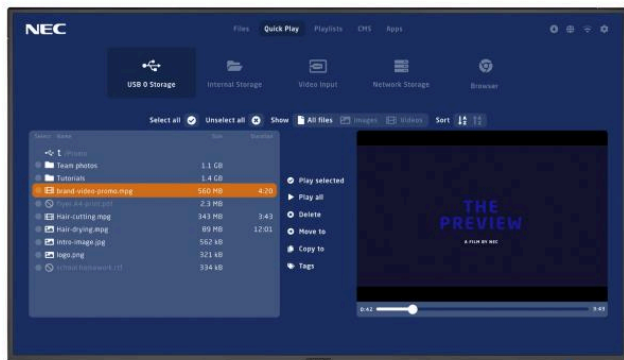

Digital signage and real-time information deployed easily

Initiating effective communication to your target audience has never been easier to plan, install and operate. Deploying Signage with consistently updated information, real-time content adaption and scheduling has never been so simple.

The 55" MultiSync® V554Q-MPi3 provides a sleek combination of intuitive media playback with professional digital display technology for impactful messaging in retail environments, leisure and museum applications as well as quick service restaurants. Fitting perfectly into corporate environments and public spaces, the modern, slim design integrates seamlessly with the surrounding architecture whilst the 500 cd/m² brightness output and anti-glare surface ensures excellent viewing.

Futureproof and upgradable, the NEC MediaPlayer Software is powered by a pre-installed modular SoC Raspberry Pi module. Enabling remote operation of single and multiple display installations, benefit from flexible usage of many media types and a scheduling function for smart content management. For specific feature demands, the NEC MediaPlayer grants easy switching to the integrated Content Management Systems directly.

Benefits

Ease of use and operation – smart installation, operation and maintenance functionality ensures accurate performance over the entire lifetime of the display saving time, effort and resources.

Everything under control – one single interface is needed to manage both the NEC MediaPlayer and the display directly, via a web-interface or the NEC Display remote control.

Mission-critical 24/7 ready operation – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

Cost Saving Device Management – save effort whilst managing all connected NEC devices from a centralised location by using the NaViSet Administrator 2 software tool.

Product Information

| | |
|---------------|------------------------------------|
| Product Name | MultiSync® V554Q-MPi3 |
| Product Group | LCD 55" Value Large Format Display |
| Order Code | 60005007 |

Display

| | |
|---------------------------------|--------------------------------------|
| Panel Technology | IPS with Edge LED backlights |
| Active Screen Area (W x H) [mm] | 1,209.6 x 680.4 |
| Screen Size [inch/cm] | 55 / 138.78 |
| Aspect Ratio | 16:9 |
| Pixel Pitch [mm] | 0.315 |
| Brightness [cd/m²] | 500 |
| Contrast Ratio (typ.) | 1100:1 |
| Viewing Angle [°] | 178 / 178 (at contrast ratio > 10:1) |
| Colour Depth [bn] | 1.073 (10bit) |
| Response Time (typ.) [ms] | 8 (grey-to-grey) |
| Panel Refresh Rate [Hz] | 60 |
| Haze Level [%] | Pro (28) |
| Supported Orientation | Face Up; Landscape; Portrait |

Synchronisation Rate

| | |
|----------------------------|----------|
| Horizontal Frequency [kHz] | 26 - 135 |
| Vertical Frequency [Hz] | 23 - 86 |

Resolution

| | | | | |
|-----------------------|--|---|---|------------|
| Native Resolution | 3840 x 2160 | | | |
| Supported Resolutions | 4096 x 2160; 1920 x 2160; 1920 x 1200; 1920 x 1080; | 1650 x 1050; 1600 x 1200; 1440 x 900; 1400 x 1050; | 1366 x 768; 1360 x 768; 1280 x 1024; 1280 x 720; | 1024 x 768 |

Connectivity

| | |
|-----------------------|--|
| Input Video Digital | 1 x OPS Slot; 2 x DisplayPort (with HDCP); 3 x HDMI (with HDCP) |
| Input Audio Analogue | 1 x 3,5 mm jack |
| Input Audio Digital | 2 x DisplayPort; 3 x HDMI |
| Input Control | LAN 100Mbit; remote control wire (3,5mm jack); RS232 |
| Input Data | 1 x USB 2.0 (Service); 1 x USB Type-B (Upstream); 2 x USB 2.0 (Compute Module, 1 x 5V/2A powered); 2 x USB 2.0 (NEC MediaPlayer) |
| Output Video Digital | 1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC) |
| Output Audio Analogue | 1 x 3,5 mm jack |
| Output Control | 1 x LAN 100Mbit |

Open Modular Intelligence

| | |
|--|--|
| OPS Slot | Slot Technology: Open pluggable specification (NEC / Intel OPS standard) |
| OPS Max. Current / Power Consumption [A / W] | 4.7 / 75 |

Sensors

| | |
|----------------------|--|
| Ambient Light Sensor | Integrated, triggered actions programmable |
|----------------------|--|

| | |
|--------------------|--|
| Human Sensor | Optional, external, 4-5m range, triggered actions programmable |
| Temperature Sensor | Integrated, 1 sensors, triggered actions programmable |
| NFC Sensor | Integrated, 2cm range, free NEC Android App required |

Electrical

| | |
|--------------------------------|---------------------------------|
| Power Consumption Eco/max. [W] | 120 Eco (shipment setting), 170 |
| Power Savings Mode [W] | < 0.5; < 2 (Networked Standby) |
| Power Management | VESA DPMS |

Environmental Conditions

| | |
|----------------------------|-----------|
| Operating Temperature [°C] | +0 to +40 |
| Operating Humidity [%] | 20 to 80 |
| Storage Humidity [%] | 10 to 90 |
| Storage Temperature [°C] | -20 to 60 |

Mechanical

| | |
|-----------------------------|---|
| Dimensions (W x H x D) [mm] | 1,238.4 x 712.8 x 68.9 |
| Weight [kg] | 27 |
| Bezel Width [mm] | 11.9 (left, right and top); 15.5 (bottom) |
| VESA Mounting [mm] | 300 x 300 (FDMI); 4 holes; M6 |
| Ingress Protection | IP5x (front); IP2x (back) |

MediaPlayer

| | |
|--------------------------------------|--|
| Supported File Storage / File System | FAT16 / FAT32 @ USB 2.0 |
| Internal Storage | 32GB eMMC (2GB occupied by OS, 28GB available for files) |
| Processor | Cortex-A53 (ARMv8) 64-bit SoC @ 1.2GHz |
| Supported Image Formats | JPG; JPEG; PNG |
| Supported Video Formats | MP4 / MOV / MKV (H.264); MPEG-2; M4K; VP8 / VP9; HTML5 |
| Supported Audio Formats | MP3; AAC; AC-3 |

Available Options

| | |
|-------------|--|
| Accessories | Feet (ST-401); Soundbar; Trolley (PDMHM-L); Wall mount (PDW S 32-55 L and P, PD02W T L L, PD03W T M P) |
| OPS Slot | HDBaseT receiver; Intel® Atom, Celeron and Core CPUs; OPS-2C Quad 3G SDI |

Green Features

| | |
|-------------------|---|
| Energy Efficiency | Ambient light sensor; Annual energy consumption: 185 kWh (based on 4 operating hours per day); ECOMode; Energy efficiency class: B; LED backlight |
|-------------------|---|

Additional Features

| | |
|-------------------------|---|
| Special Characteristics | 12-bit Look Up table; Ambient Light Sensor; AMX NetLinx Support; Auto ID assignment; Auto tiling function; Automated Email Alert; CEC Support; Cisco Webex Kit compatible; Crestron Connected Support; Crestron RoomView Support; DICOM Simulation; Emergency Notification; HDMI with UHD at 60 Hz; HDR Gamma Support (PQ, HLG); Intelligent Wireless Data (based on NFC); KeyGuide; NaViSet Administrator 2; OSD rotation for portrait mode; PJLink Support; Powered USB-Port; Removable Logo; Scheduler; Screen saver functions; SNMP Support; TileMatrix (10 x 10); USB Media Player |
| Safety and Ergonomics | CE; EAC; EMC Class B; FCC; REACH; RoHS; UL/C-UL; UL/C-UL or CSA |
| Pixel Failure Class | ISO 9241-307, Class 1 |

| | |
|------------------|--|
| Audio | Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W) |
| Shipping Content | Display; DisplayPort Cable; HDMI Cable; Power Cable; Remote Control; User Manual |
| Operating Hours | 24/7 |



CE



RoHS

This document is © 2020 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 05.05.2020